


BEAM LIGHTS



- Glass bulb ensures quick heat dissipation avoids corrosion.
- Both Parts of the body are joined by composite glue that ensures IP68 isolation.
- 30,000 hours of LED lamp life.
- LED lamps are energy efficient and more environmentally friendly than halogen lamps.
- Lamps are available in: 144 and 252 LED bulbs White or RGB.

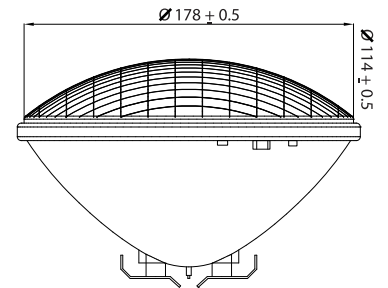

Code	Model	Description	Light Source	Line Voltage	Power	Brightness	Angle	Color Temperature	Average Life Time*
CX-50121	501-0001	144 White		12V AC	12 watt	550 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50122	502-0001	144 RGB		12V AC	12 watt	400 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50123	505-0001	144 RGB with remote control	5mm Diameter	12V AC	12 watt	400 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50124	503-0001	252 White	LED bulbs	12V AC	21 watt	1020 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50125	504-0001	252 RGB		12V AC	21 watt	770 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50126	506-0001	252 RGB with remote control		12V AC	21 watt	770 LM	15 ~ 18	2 800 K ~ 10.000 K	30,000 hours
CX-50127	501-0001	Bulb PAR56-300W -12V(Spare Part)		12V AC	300 watt	—	—	—	—

Deck Box - Transformer

Transformer

Code	Model	Rated Power (W)	Input Voltage (V)	Out Voltage
CX-50128	83108	50	220 ~ 240V	PWM
CX-50129	83101	100	220 ~ 240V	PWM
CX-50130	83103	300	220 ~ 240V	PWM

Deck Box

Code	Rated Power (W)
CX-50131	Junction Box for UWL

