



- Manufactured in polyamide and ABS, the unit can survive the typical chemical and temperature exposure of a swimming pool for years
- Readily fitted to any existing pool, as no niche is required for installation
- Anchored directly to the wall with a reinforced plastic cross, anchor plugs and screws
- Patented locking system and easy process of lamp substitution
- Available with 144 LED lamps.
- For concrete and prefabricated pools.
- CE certified by SGS.
- Compared to a halogen lamp the LED uses much less energy.
- Environmental friendly.
- Supplied in color and white light.
- Can be used without water.

Designed to be used fully submerged underwater in fresh water swimming pools.

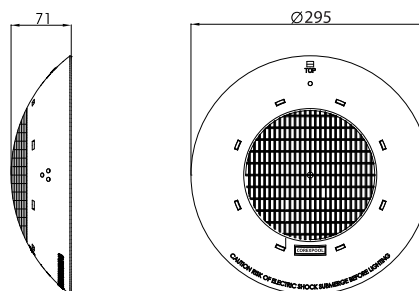

Model	Code	Type	LED - SMD	Front Plate	W	V	Cable (m)
603B	CX-50105	WW	144	ABS	18	12	2,5
604B	CX-50106	RGB	144	ABS	18	12	2,5
605B	CX-50107	WW	252	ABS	24	12	2,5
606B	CX-50108	RGB	252	ABS	24	12	2,5
603C	CX-50105	WW	1X18	ABS	18	12	2,5
604C	CX-50106	RGB	1X18	ABS	18	12	2,5
605C	CX-50107	WW	1X24	ABS	24	12	2,5
606C	CX-50108	RGB	1X24	ABS	24	12	2,5
RC	CX-50106-RC	REMOTE CONTROL FOR RGB LIGHT					

- Manufactured in polyamide and ABS, the unit can survive the typical chemical and temperature exposure of a swimming pool for year.
- Class III electric apparatus with very low voltage for safety (12V with alternating current).
- PAR56 lamp complying with IPX8 degree of protection (resistant to penetration of dust, solid bodies and humidity) at a nominal immersion depth of 2m.
- Environmental friendly
- Compared to a halogen lamp the LED uses much less energy
- Available for concrete and liner pools.
- Optional polished stainless steel face plate.
- 30,000 hours of LED lamp life.
- Supplied in color and white light.
- PAR56 lamps are available in 144 LED bulbs and 52 LED bulbs.
- With the color 252 LED bulbs model, a remote control is optional.

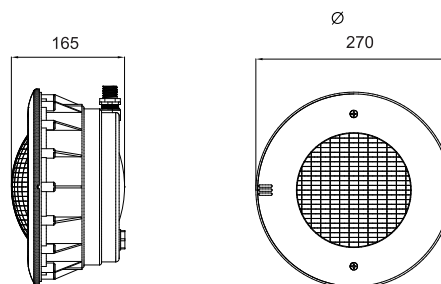

Model	Code	Type	LED Lamps	LED Color	W	V	Cable (m)
501B	CX-50109	White	144	White	12	12	2,5
502B	CX-50110	Color	144	RGB	12	12	2,5
503B	CX-50111	White	252	White	21	12	2,5
504B	CX-50112	Color	252	RGB	21	12	2,5