





MULTIPOINT VALVE


Corex 6 WAY VALVE 1 1/2", 2", 3" back wash valve "Side Mount" (SM)

Characteristics:


Easy handling, clear, multi function and non-smudging laser marking, optimal flow and pressure loss rates, extreme low-noise operation, made of high quality, UV resistant and impact resistant ABS materials, use of very durable sealing materials and pressure springs, installed on the valve plate, pressure tightness and operation tests according to DIN 3230, easy installation of our manual and automatic back wash valve. Available in 1 1/2", 2", 3" ABS (3,5 bar) and in various colours and connection models.



Pressure loss Back wash

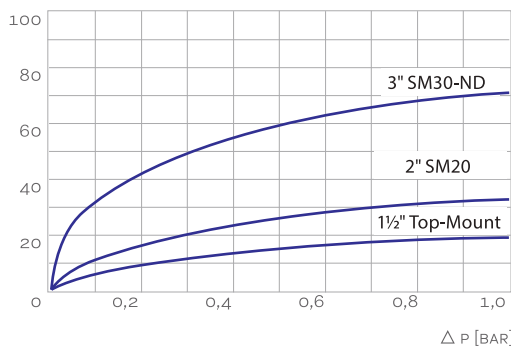

Pressure loss Filter

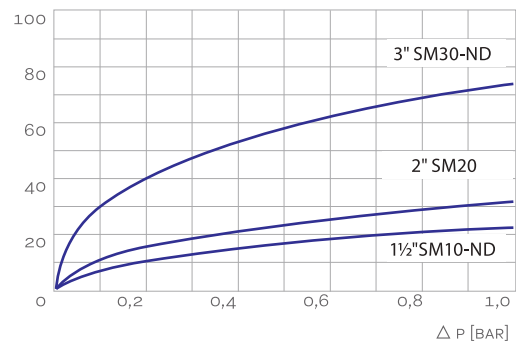

Model	Dimensions	Pressure / 20 degree	Size	Recommended Flow rate "Filter"	Body connection	Colour
03021201B	125mm	3,5 bar	1 1/2"	17 m³/h	BSP/NPT female thread	white, black other colours on request.
03021202	230mm	3,5 bar	2"	27 m³/h	DIN mm /ASTM imperial solvent connections	
03021202B	230mm	3,5 bar	2"	27 m³/h	ABS Material	
03021203B	270mm	3,5 bar	2.5"	47 m³/h	TPE/EPDM	
03021204B	270mm	3,5 bar	3"	56 m³/h		