


SUMP-ONE



Overall dimension

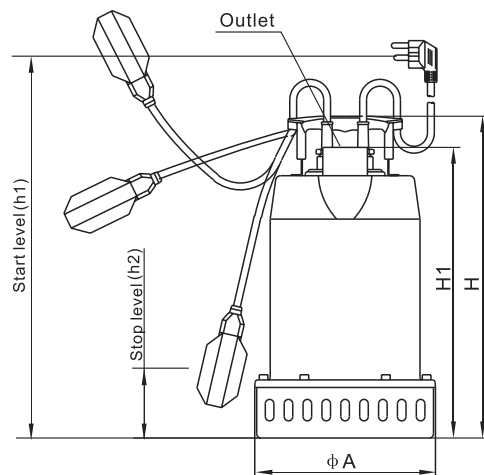

- Electric pump with float switch for liquid level control

Features

1. Open impeller, suit to < 10mm solid particle.
2. Double shaft seal.
3. High temperature bearing.
4. copper winding.
5. stainless steel housing.
6. with USA Ti thermal protector.

Overall dimension

Model	H	H1	h1	h2	A
CX-20101	360	324	415	80	211
CX-20102	360	324	415	80	211
CX-20103	375	339	430	80	211

Working conditions


Medium temperature: 0~40°C

The diving depth should be less than: 5m

Application

- Suitable for clean water, sea water.
- Farming, Fountain, Water features, water supply, circulation, and water changing .
- Equipment for Gardening, Aquarium, Landscape waterfall, Water drainage and filtration .

Performance curves

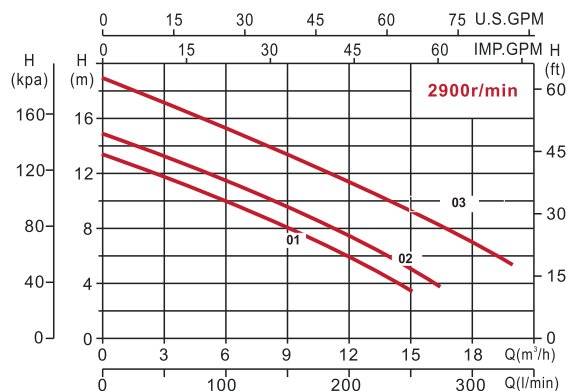

Technical parameter list

Model	Power(P2) KW	(Amps) 220V/50Hz	Hmax (m)	Qmax (m³/h)	Outlet	G.W (Kg)	Packing size (mm)
CX-20101	0.55	3.8	13.5	15	G1.5"	9.8	425×260×300
CX-20102	0.75	5.2	15	16.5	G1.5"	10.5	405×260×300
CX-20103	1.5	9.2	19	20	G1.5"	13	420×260×300