LED LIGHTS

LED-SMD • Wall-mounted range

MATERIAL & CONSTRUCTION


Manufactured in polyamide and ABS to withstand the typical chemical and temperature exposure of a swimming pool for years.



KEY FEATURES & BENEFITS

- Fits existing pools without an installation niche.
- Anchored directly to the wall with a reinforced plastic cross, anchor plugs and screws.
- Patented locking system and easy lamp substitution.
- Available with 144 LED lamps.
- For concrete and prefabricated pools.
- CE certified by SGS.
- Uses much less energy than a halogen lamp; environmentally friendly.
- Supplied in color and white light.
- Can be used without water.
- Designed for fully submerged underwater use in fresh water swimming pools.

TECHNICAL DRAWING • SIDE & FACE VIEWS

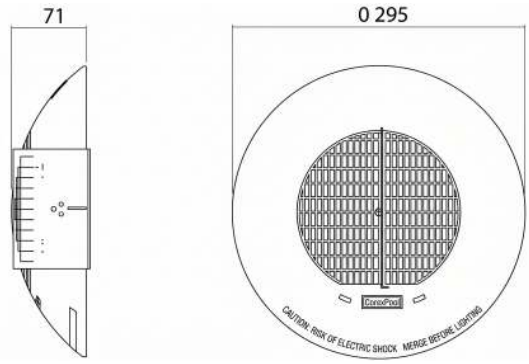

MODEL RANGE & TECHNICAL DATASHEET

Model	Code	Type	LED-SMD	Front Plate	W	V	Cable (m)
603	CX-50104	CW	144	ABS	18	12	2,5
603B	CX-50105	WW	144	ABS	18	12	2,5
604B	CX-50106	RGB	144	ABS	18	12	2,5
605B	CX-50107	WW	252	ABS	25	12	2,5
606B	CX-50108	RGB	252	ABS	25	12	2,5
607B	CX-50109	CW	252	ABS	25	12	2,5
608B	CX-50110	WW	485	ABS	45	12	2,5
609B	CX-50111	RGB	485	ABS	45	12	2,5
610B	CX-50112	CW	485	ABS	45	12	2,5
RC	CX-50106-RC	REMOTE CONTROL FOR RGB LIGHT					

LED LIGHTS

PAR56 • Technical Datasheet & Product Views

MATERIAL & PROTECTION

- Manufactured in polyamide and ABS to withstand typical pool chemical and temperature exposure.
- Class III electric apparatus with very low voltage for safety: 12V alternating current.
- PAR56 lamp complying with IPX8 protection (resistant to penetration of dust, solid bodies and humidity), at a nominal immersion depth of 2m.


FEATURES & OPTIONS

- Environmentally friendly; uses much less energy than a halogen lamp.
- For concrete and liner pools.
- Optional polished stainless steel face plate.
- 30,000 hours of LED lamp life.
- Supplied in color and white light.
- PAR56 lamps available in 144 LED bulbs and 52 LED bulbs.
- Optional remote control with the color 252 LED bulbs model.

MODEL RANGE & TECHNICAL DATASHEET

Model	Code	Type	LED Lamps	LED Color	W	V	Cable (m)
5018	CX-50116	WW	25 W	White	12	12	2,5
502B	CX-50117	RGB	25 W	RGB	12	12	2,5
503B	CX-50118	CW	25 W	White	21	12	2,5

TECHNICAL DRAWING • SIDE & FACE VIEWS

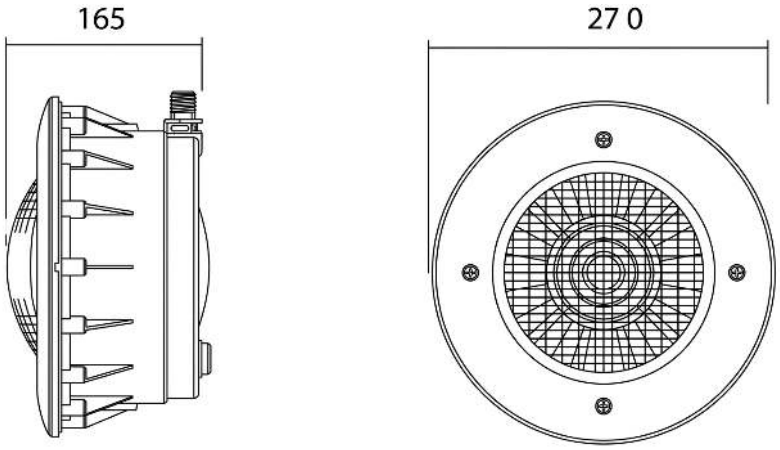

EXPLODED VIEW

The supplied catalog includes assembled product and dimensional views only. An exploded assembly drawing and component list are not provided.