RETURN WALL INLET & SUCTION VACUUM

Glue 63mm • UV White ABS

PRODUCT OVERVIEW

The Return Wall Inlet Glue 63mm is crafted for seamless integration and long-term reliability in pool circulation systems. Its glue-fit connection creates a permanent, high-strength seal that completely eliminates leakage risk and water loss. Manufactured from superior-grade ABS in a polished white finish, it resists harsh pool chemicals, UV rays, and fluctuating water temperatures.



RETURN INLET & SUCTION VACUUM

KEY FEATURES & BENEFITS

Seamless Glue Connection

Features a 63mm glue-fit joint providing a strong, leak-proof and permanent bond for lasting reliability.

Premium ABS Construction

Built from high-quality ABS material offering superior resistance to pool chemicals and temperature variation.

Optimized Water Circulation

Ensures smooth, uninterrupted return flow to enhance pool filtration and overall system efficiency.

MATERIALS & CONSTRUCTION

Superior-Grade ABS

UV White ABS with a polished white finish. Resistant to harsh pool chemicals, UV rays, and fluctuating water temperatures.

GLUE-FIT CONNECTION

63mm

Permanent, high-strength seal

MODEL RANGE

CX-40103 **CX-40104**

Glue 63mm


GLUE 63mm POOL FITTINGS

Technical Datasheet & Component Identification

TECHNICAL DATASHEET


C-Code	Color	Material	Description	Flow Rate (L/min)	L	H	W
CX-40103	UV White	ABS	Glue 63mm	240	66.5	57.1	24
CX-40104	UV White	ABS	glue 63mm	240	66.5	57.1	24

SIDE VIEW

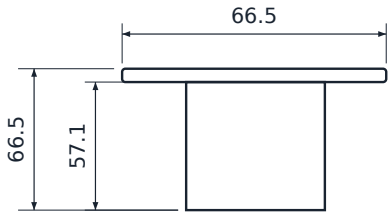


Glue 63mm


FACE VIEW



L / H / W units are not stated in the source. The table specifies Glue 63mm, while the supplied exploded-view labels say “thread”; both are retained. Dimensional views are not to scale.

EXPLODED VIEW & COMPONENT IDENTIFICATION

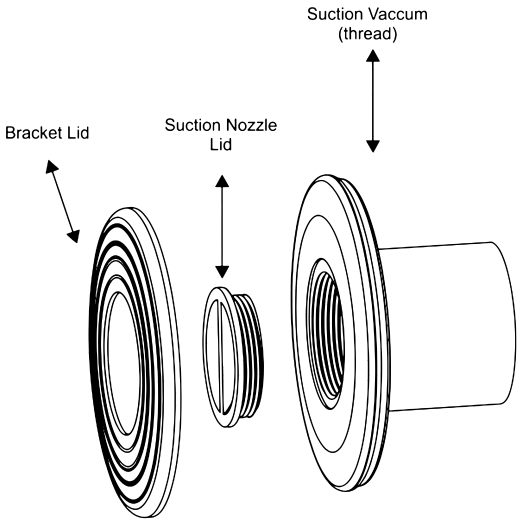

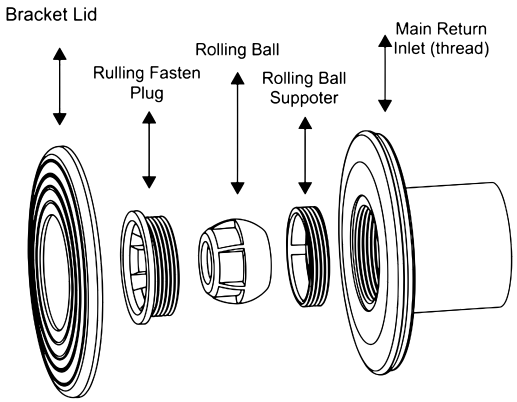

SUCTION VACUUM COMPONENTS

Bracket Lid
Suction Nozzle Lid
Suction Vaccum (thread)

RETURN INLET COMPONENTS

Bracket Lid
Rulling Fasten Plug
Rolling Ball
Rolling Ball Suppoter
Main Return Inlet (thread)